

Seat Installation X3 Series




Seat should be on the right side of cart

(NOTE: Left/Right is determined standing behind the cart)

Step 1: Slide seat bracket through opening in lower frame connector.

Tighten the wing nuts to secure bracket in place.

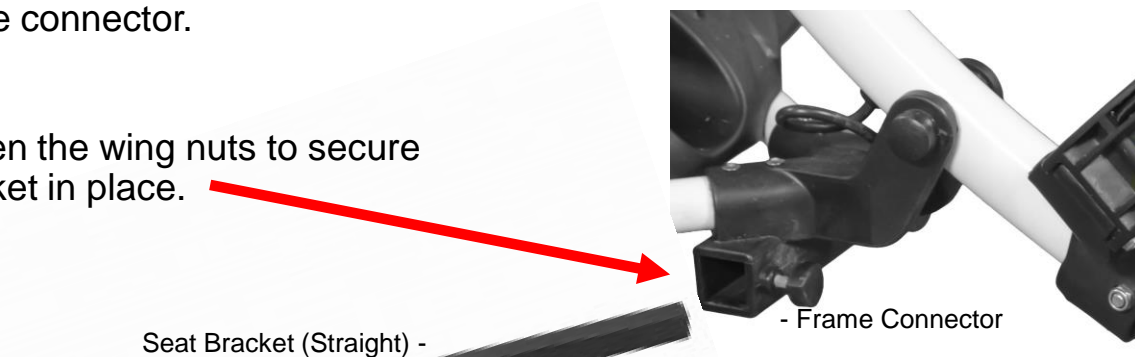

Step 2: Attach seat to top of seat post (tight fit)



Step 3: Fit bottom of seat into slot on the bracket (tight fit)

Seat Post -

Step 4: Test by hand to make sure post assembly base sets firmly on the ground when weight is applied.

